


Q&A

Dialtone out DSX-1 Port of Total Access 900 and 900e

Q: Can the TA900 supply dial tone out the DSX-1 interface for an E&M trunk?

A: The TA900 currently (AOS 11.03) does not supply dial tone to the DSX-1 voice trunks. The dial tone for this application should come from the connected PBX. If the TA900 is connected to a channel bank (such as the TA600), that channel bank or IAD will need to be able to provide dial tone for its connected stations. If the second channel bank cannot provide dial tone the user will have to blind dial from those stations.

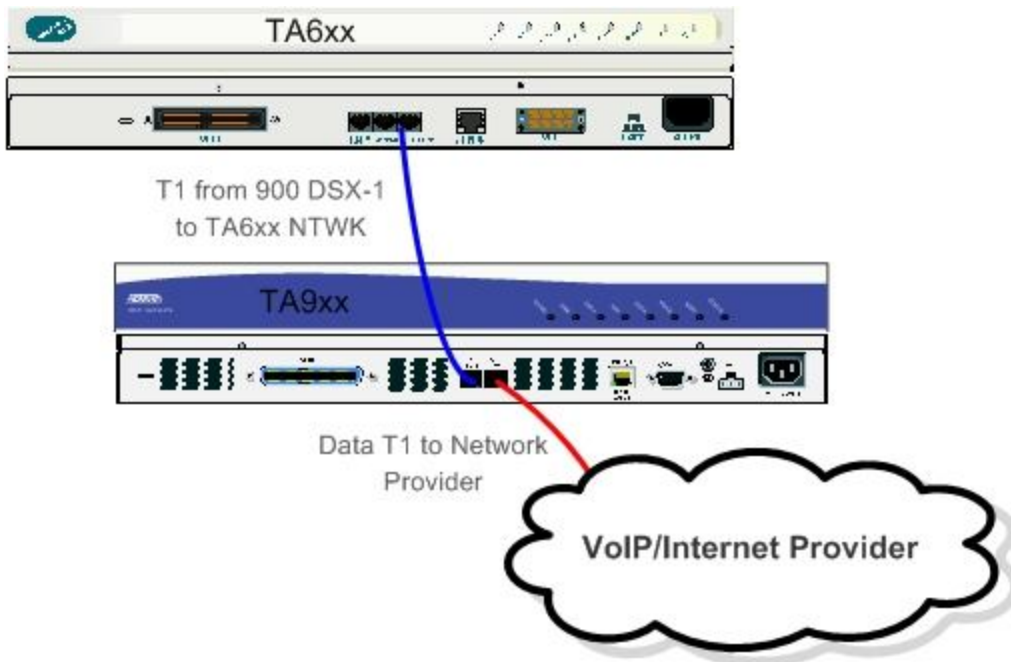

The TA6xx can provide a 5 second false DT for E&M lines. This is found under Interfaces -> FXS -> Config -> Tandem Options. The dial tone is just there for comfort; it cannot be broken during the 5 seconds it plays.