

19-inch Rack Mount Brackets (Installation)

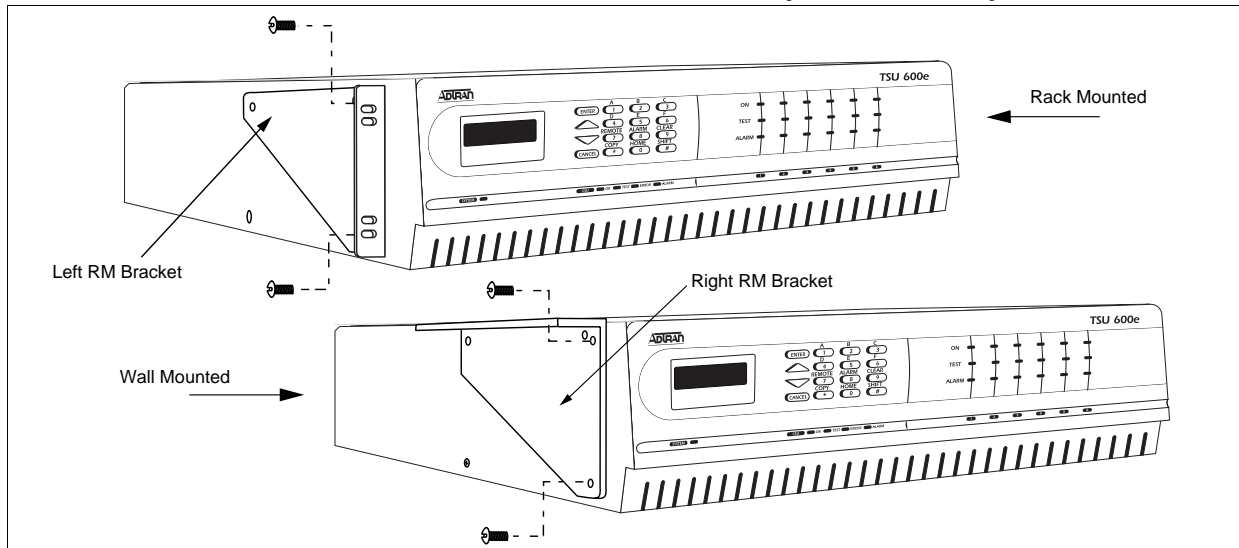


Figure 1. Installation of Rack Mount Brackets on a TSU 600e

INSTALLATION

These instructions apply to the following products:

- ATLAS 800 Family Line of Products
- Total Access TA 4303
- TSU 600 Family Line of Products

Two screws mount each rack mount (RM) bracket. These brackets can be installed for either rack mount or wall mount, as described below:

Installation in a Rack

The unit on the upper left in Figure 1 shows installation of the RM brackets for a rack mount. The right RM bracket goes on the right side of the box, and the left RM bracket goes on the left side of the box.

Installation on a Wall

The unit on the lower right in Figure 1 shows installation of the RM brackets for a wall mount. In this case, the *left* RM bracket goes on the *right* side of the unit, and the *right* RM bracket goes on the *left* side. You will need four additional screws to secure the unit to the wall. These screws should be #14 wood screws, 3/4-inch minimum length. The unit should be mounted to 3/4-in plywood.

WARRANTY AND CUSTOMER SERVICE

ADTRAN will replace or repair this product within five years from the date of shipment if it does not meet its published specifications or fails while in service (refer to ADTRAN Equipment Warranty and Repair and Return Policy and Procedure).

Return Material Authorization (RMA) is required prior to returning equipment to ADTRAN.

For service, RMA requests, or further information, contact the following:

ADTRAN Customer Service

CAPS Department	(256) 963-8722
Technical Support	(888) 4ADTRAN
Applications Engineering	(800) 615-1176
Sales	(800) 827-0807

Repair and Return Address

ADTRAN, Inc.
6767 Old Madison Pike
Progress Center
Building #6 Suite 690
Huntsville, AL 35807

RMA # _____