

## GETTING STARTED

Two configuration methods are available for your NetVanta router:

- Web-based graphical user interface (GUI)
- AOS command line interface (CLI)

The GUI lets you configure the main unit settings and provides online guidance and explanations for each setting. However, using the AOS CLI may be necessary for more advanced configurations.

## ACCESS THE GUI

You may access the GUI from any Web browser on your network by following these steps:

1. Connect the router to your PC using one of the **ETHERNET** ports on the back of the unit.
2. During bootup, your PC will obtain an IP address from the NetVanta 300 Series unit's DHCP server. By default, both the DHCP and HTTP servers are enabled.
3. Enter the unit's IP address in your browser address line. The default IP address is **10.10.10.1**.
4. You will then be prompted for the user name and password (the default settings are **admin** and **password**).
5. The initial GUI screen appears.
6. Select **Getting Started** in the **System** menu on the left side of your screen and follow the online instructions.

**NOTE**

*For security purposes, you should set up an **admin** password immediately. Use the **Passwords** page of the GUI to change this password.*

**NOTE**

*By default, the NetVanta unit comes with an ADSL and an asynchronous transfer mode (ATM) port already configured and enabled. The service provider should provide a PVC (VPI/VCI) number that will be used to configure the ATM PVC.*

## CONFIGURE THE ATM PVC

1. Select the **Getting Started** link under the **System** menu. This brings up a side bar page.
2. Select **Step 1 - Configure the Public Interface** at the top of the side bar page to open the **ATM PVC** page.
3. Enter the PVC number and select an **Interface Mode**. Usually this is PPP or PPPoE; however, if **IP routing** is chosen, you will need to enter an IP address.
4. Select **Apply**. If PPP or PPPoE is selected as the **Interface Mode**, you will be taken to the **PPP** page after selecting **Apply**. Here you will need to select the type of authentication needed, authentication passwords, and the **Address Type**. In most cases, you will want the **Address Type** to be **Negotiated**. Select **Apply** when all the information is complete.

## ACCESS THE CLI

If needed, you can access the AOS CLI via a Telnet session.


1. Telnet to the unit's IP address. The default IP address is **10.10.10.1**.
2. You will then be prompted for the user name and password (the default settings are **admin** and **password**).
3. Enter **enable** at the > prompt.
4. Enter the enable password when prompted. The default password is **password**.

## FACTORY DEFAULT SWITCH


- If the factory default switch (shown in the back panel illustrations on the next page) is pressed during bootup, the unit will stay in bootstrap mode. Since the unit has no serial port, Telnet has been built into the boot code. The default IP address is 10.10.10.1.
- If the factory default switch is pressed and held for 5 seconds after boot, the **ETHERNET** interface on the NetVanta 340 (or the **VLAN 1** interface on the NetVanta 344) will default to 10.10.10.1 and all access policies will be removed from that interface.
- If the factory default switch is pressed and held for 30 seconds, a default configuration will overwrite your existing configuration and reboot the unit.

**NOTE**

*The default switch must be pressed **WHILE** the power light is flashing green. Do not press the default switch **BEFORE** the power light is flashing green, as this will cause boot to be missed.*

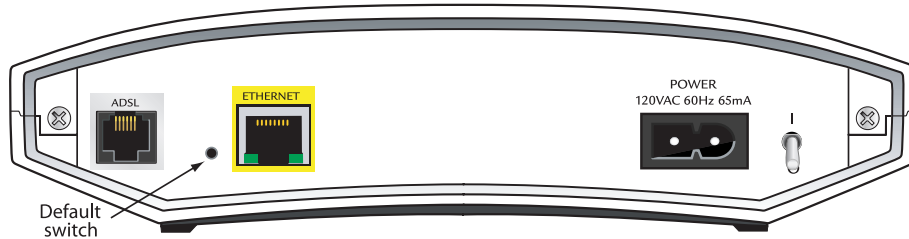

**NetVanta 340 Rear Panel Layout**

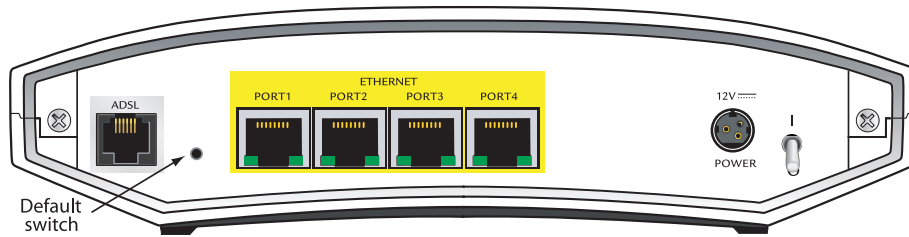

**NetVanta 344 Rear Panel Layout**

**ADSL CONNECTOR PINOUTS**

Pin	Name	Description
1, 2	—	Unused
3	T	ADSL Tip
4	R	ADSL Ring
5, 6	—	Unused

**ETHERNET PINOUTS**

Pin	Name	Description
1	TX1	Transmit Positive
2	TX2	Transmit Negative
3	RX1	Receive Positive
4, 5	—	Unused
6	RX2	Receive Negative
7, 8	—	Unused

**CONFIGURE YOUR APPLICATION**

More detailed documentation for configuring your ADTRAN unit is provided online at [www.adtran.com](http://www.adtran.com). For more detail on hardware setup, refer to the appropriate hardware installation guide. For more detail on configuring your system, refer to the *AOS Command Reference Guide*, configuration guides, and technical support notes.



*Important: For additional details on product features, specifications, installation, and safety, refer to the appropriate hardware installation guide available online at [www.adtran.com](http://www.adtran.com).*