



NetVanta 644 VoIP Gateway Hardware Installation Guide

1700144G1

NetVanta 644

Trademarks

Any brand names and product names included in this manual are trademarks, registered trademarks, or trade names of their respective holders.

To the Holder of the Manual

The contents of this manual are current as of the date of publication. ADTRAN reserves the right to change the contents without prior notice.

In no event will ADTRAN be liable for any special, incidental, or consequential damages or for commercial losses even if ADTRAN has been advised thereof as a result of issue of this publication.

Software Licensing Agreement

Each ADTRAN product contains a single license for ADTRAN-supplied software. Pursuant to the Licensing Agreement, you may: (a) use the software on the purchased ADTRAN device only and (b) keep a copy of the software for backup purposes. This Agreement covers all software installed on the system, as well as any software available on the ADTRAN website. In addition, certain ADTRAN systems may contain additional conditions for obtaining software upgrades.



Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000
Phone: (256) 963-8000

Copyright © 2011 ADTRAN, Inc.
All Rights Reserved.
Printed in U.S.A.

Conventions

**NOTE**

Notes provide additional useful information.

**CAUTION**

Cautions signify information that could prevent service interruption or damage to the equipment.

WARNING

Warnings provide information that could prevent injury or endangerment to human life.

Safety Instructions

When using your telephone equipment, please follow these basic safety precautions to reduce the risk of fire, electrical shock, or personal injury:

1. Do not use this product near water, such as a bathtub, wash bowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.
2. Avoid using a telephone (other than a cordless type) during an electrical storm. There is a remote risk of shock from lightning.
3. Do not use the telephone to report a gas leak in the vicinity of the leak.
4. Use only the power cord, power supply, and batteries indicated in the manual. Do not dispose of batteries in a fire. They may explode. Check with local codes for special disposal instructions.
5. The socket-outlet shall be installed near the equipment and shall be easily accessible.

If any of the following conditions occur, unplug the product from the electrical outlet and replace the part or contact your qualified service personnel:

1. The power cable, extension cable, or plug is damaged.
2. An object has fallen into the product.
3. The product has been exposed to water.
4. The product has been dropped or damaged.
5. The product does not operate correctly when you follow the operating instructions.



These units contain no user-serviceable parts. They should only be serviced by qualified service personnel.



This equipment incorporates double pole/neutral fusing. If the neutral fuse opens and the line fuse does not open, voltage could still be present in the unit.



Additional safety guidelines, such as Waste Electrical and Electronic Equipment (WEEE), are given in the document [NetVanta Safety and Regulatory Information](#) (ADTRAN's Knowledge Base article 3444) available at <http://kb.adtran.com>.

Save These Important Safety Instructions

FCC-Required Information

FCC regulations require that the following information be provided in this manual:

1. This equipment complies with Part 68 of Federal Communications Commission (FCC) rules and requirements adopted by America's Carriers Telecommunications Association (ACTA). Each registered interface has a label that contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, provide this information to the telephone company.
2. If this equipment causes harm to the telephone network, the telephone company may temporarily discontinue service. If possible, advance notification is given; otherwise, notification is given as soon as possible. The telephone company will advise the customer of the right to file a complaint with the FCC.
3. The telephone company may make changes in its facilities, equipment, operations, or procedures that could affect the proper operation of this equipment. Advance notification and the opportunity to maintain uninterrupted service are given.
4. If experiencing difficulty with this equipment, please contact ADTRAN for repair and warranty information. The telephone company may require this equipment to be disconnected from the network until the problem is corrected, or it is certain the equipment is not malfunctioning.
5. This unit contains no user-serviceable parts.
6. This equipment is designed to connect to the telephone network or premises wiring using an FCC-compatible modular jack, which is compliant with Part 68 and requirements adopted by ACTA.
7. The following information may be required when applying to the local telephone company for leased line facilities:

Part Number	Registration Number	Service Type	REN/SOC	FIC	USOC
1700144G1	US: HDCDENAN1700144G1	1.544 Mbps - SF 1.544 Mbps - SF and B8ZS 1.544 Mbps - ESF 1.544 Mbps - ESF and B8ZS	N/A/6.0N	04DU9-BN 04DU9-DN 04DU9-1KN 04DU9-1SN	RJ-48C

8. The ringer equivalency number (REN) is useful in determining the quantity of devices you may connect to your telephone line and still have all of those devices ring when your number is called. In most areas, the sum of the RENs of all devices should not exceed five. To be certain of the number of devices you may connect to your line as determined by the REN, call your telephone company to determine the maximum REN for your calling area.
9. This equipment may not be used on coin service provided by the telephone company. Connection to party lines is subject to state tariffs. Contact your state public utility commission or corporation commission for information.

FCC Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio frequencies. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Industry Canada Compliance Information

Notice: The Industry Canada label applied to the product (identified by the Industry Canada logo or the “IC:” in front of the certification/registration number) signifies that the Industry Canada technical specifications were met.

Notice: The REN for this terminal equipment is supplied in the documentation or on the product labeling/markings. The REN assigned to each terminal device indicates the maximum number of terminals that can be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the RENs of all the devices should not exceed five (5).

Canadian Emissions Requirements

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled “Digital Apparatus,” ICES-003 of the Department of Communications.

Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Class A prescrites dans la norme sur le matériel brouilleur: “Appareils Numériques,” NMB-003 édictée par le ministre des Communications.

Service and Warranty

For information on the service and warranty of ADTRAN products, visit the [Support](#) section of the ADTRAN website at <http://www.adtran.com>.

Table of Contents

Introduction	13
Physical Description	14
Shipping Contents	14
Front Panel Design	15
Rear Panel Design	16
Product Specifications	17
Unit Installation	18
Tools Required	18
Mounting Options	19
Supplying Power to the Unit	22
Optional Battery Backup Unit (P/N 1175044L1)	22
Appendix A. Connector Pin Definitions.	27
Index	29

List of Figures

Figure 1. NetVanta 644 Front Panel Layout	15
Figure 2. NetVanta 644 Rear Panel Layout	16
Figure 3. Wallmount Installation	21
Figure 4. Wall Mounting the BBU	23

List of Tables

Table 1.	Front Panel LEDs.....	15
Table 2.	BBU Specifications.....	25
Table A-1.	T1/E1 Port Pinouts.....	27
Table A-2.	10/100/1000Base-T Ethernet Port Pinouts	27
Table A-3.	CRAFT Port Pinouts.....	27

1. INTRODUCTION

This hardware installation guide describes the NetVanta 644 unit's physical characteristics, lists their features and specifications, introduces basic functionality, and provides installation instructions.

- *Physical Description on page 14*
- *Product Specifications on page 17*
- *Unit Installation on page 18*

For additional information on shipping contents, mounting options, and power the unit, refer to the following sections:

- *Shipping Contents on page 14*
- *Mounting Options on page 19*
- *Supplying Power to the Unit on page 22*
- *Optional Battery Backup Unit (P/N 1175044L1) on page 22*

For information on configuration for a specific application, refer to the configuration guides provided on ADTRAN's Knowledge Base at <http://kb.adtran.com>. For details on the command line interface (CLI), refer to the [AOS Command Reference Guide](#) (ADTRAN's Knowledge Base article 2219).

2. PHYSICAL DESCRIPTION

The NetVanta 644 are multiservice Internet Protocol (IP) business gateways designed for use in Voice over IP (VoIP) environments in small-to-medium sized businesses worldwide. This product line is a high-bandwidth business gateway designed to allow carriers to deliver up to 120 channels of VoIP to their customers.

The NetVanta 644 can provide up to 120 channels of VoIP and includes four modular T1/E1 wide area network (WAN) interfaces, two 10/100/1000Base-T Ethernet ports, an integrated router, stateful inspection firewall, and transparent Session Initiation Protocol (SIP) proxy. The NetVanta 644 units run ADTRAN Operating System (AOS), and are managed through an EIA-232 port (DB-9) located on the front panel, Telnet session, or Web-based graphical user interface (GUI). The NetVanta 644 is RoHS compliant (telecommunications exemption).

The NetVanta 644 comes equipped with an AC power supply and an onboard battery charger for use with an ADTRAN battery backup unit that can keep the unit running with all interfaces active should the AC power fail.

This section includes a list of features, a list of shipping contents, and a description of the unit's front and rear panel designs. For additional information, refer to the following sections:

- [Mounting Options on page 19](#)
- [Supplying Power to the Unit on page 22](#)

Shipping Contents

Each NetVanta 644 unit is shipped in their own cardboard shipping carton. Open each carton carefully, and avoid deep penetration into the carton with sharp objects.

After unpacking the unit, inspect it for possible shipping damage. If the equipment has been damaged in transit, immediately file a claim with the carrier and contact ADTRAN Customer Service (refer to the [Repair and Return](#) section of the [Support](#) page on the ADTRAN website at <http://www.adtran.com>.)

Shipments of the NetVanta 644 include the following items:

- NetVanta 644 base unit
- A detachable power cable with a grounded, three-prong plug
- Mounting brackets
- Quick start guide

Front Panel Design

The NetVanta 644 front panel is shown below.

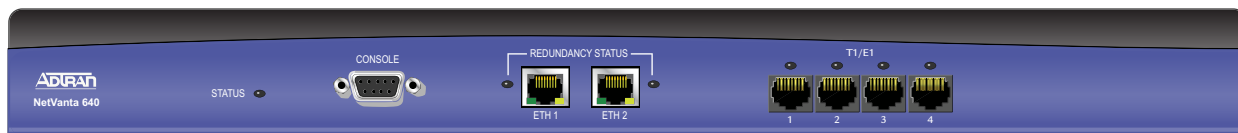


Figure 1. NetVanta 644 Front Panel Layout

Front Panel Features

Status LEDs

The status LEDs are located on the right side of the front panel. The **STATUS** LED indicates the unit’s status. The **REDUNDANCY STATUS** LEDs indicate whether the Ethernet interfaces are in redundancy mode. The **T1/E1 1** through **T1/E1 4** LEDs reflect the status of the WAN interfaces. The **ETH 1** and **ETH 2** LEDs reflect the status of the LAN interfaces. [Table 1](#) below describes the front panel LEDs.

Table 1. Front Panel LEDs

LED	Color	Indication
STATUS	Off	Unit is not receiving power.
	Green (flashing)	On power up, the STATUS LED flashes rapidly for five seconds, during which time the user may escape to boot mode from the CONSOLE port.
	Green (solid)	Power is on and the unit is functioning normally.
	Amber (solid)	Power has failed and the unit is in battery backup mode.
	Red	Power is on, but the self-test failed.
REDUNDANCY STATUS	Off	Redundancy mode has not been activated.
	Green (solid)	Redundancy mode has been activated and the corresponding interface is active.
	Amber (solid)	Redundancy mode has been activated and the corresponding interface is on standby.
	Red	Redundancy mode has been activated but there is a fault in the circuit.
T1/E1 1 through T1/E1 4	Off	All ports are inactive or administratively disabled.
	Green (solid)	Port is functioning normally.
	Amber (solid)	Port is in test mode.
	Red	Alarm or fault condition is occurring on the port interface.
ETH 1, ETH 2	Off	LAN is administratively disabled or link is down.
	Green (solid)	The link is up.
	Amber (flashing)	There is activity on the link.

10/100/1000Base-T Ethernet Interfaces

The **ETH 1** and **ETH 2** ports are RJ-45 connectors. See [Table A-2 on page 27](#) for the Ethernet interface pinouts.

CONSOLE Interface

The **CONSOLE** interface is an EIA-232 serial port (DCE), which provides for local management and configuration (via a DB-9 female connector). See [Table A-3 on page 27](#) for the craft interface pinouts.



Connection directly to an external modem requires a cross-over cable.

Rear Panel Design

The NetVanta 644 rear panel is shown below.



Figure 2. NetVanta 644 Rear Panel Layout

Rear Panel Interfaces

Power Connection

The rear panel has a power input to a 110 to 240 VAC power supply with an IEC connector. The appropriate three-prong cable is included in the shipment. Refer to [Supplying Power to the Unit on page 22](#) for connection details.

Battery Backup Connection

An optional battery backup unit (P/N 1175044L1) is available for use in case of power outages. The battery backup unit connects to the **BATT** port, which also charges the unit during operation. Refer to [Optional Battery Backup Unit \(P/N 1175044L1\) on page 22](#) for connection details.

3. PRODUCT SPECIFICATIONS

The NetVanta 644 products have the following features:

- Supports 4 modular T1/E1 WAN (RJ-48C) interfaces
- Supports 2 auto medium dependent interface/medium dependent interface crossover (MDI/MDIX) 10/100/1000Base-T Ethernet ports (RJ-45)
- Supports up to 120 channels of VoIP
- Stateful inspection firewall
- Quality of service/network address translation/Dynamic Host Configuration Protocol (QoS/NAT/DHCP) client, server, and relay
- Supports SIP trunks
- Supports Point-to-Point Protocol (PPP), Multilink PPP (MLPPP), Frame Relay, Multilink Frame Relay (MLFR), and high level data link control (HDLC)
- Three-way conferencing
- Fax and analog modem compatible (V.29, V.32, V.32bis, V.34, V.90, V.92)
- Up to 8 channels of ITU T.38
- Up to 120 channels of G.711 (μ -law)
- Up to 120 channels of G.729
- Up to 120 channels of dual tone multi-frequency (DTMF) detection/generation
- Supports 64 ms echo cancellation
- 200 ms adaptive jitter buffer per channel
- User-friendly GUI and a familiar CLI
- LEDs for system status information
- Chassis dimensions: 1.75-inch H x 17.00-inch W x 7.75-inch D
- AC power: 110 to 240 VAC, 50/60 Hz
- Operating temperature: 32°F (0°C) to +122°F (+50°C)

4. UNIT INSTALLATION

The instructions and guidelines provided in this section cover hardware installation topics, such as mounting options and supplying power to the unit. These instructions are presented as follows:

- [Mounting Options on page 19](#)
- [Supplying Power to the Unit on page 22](#)

For information on configuring a specific application, refer to the configuration guides provided on the [ADTRAN's Knowledge Base](#) or the [AOS Command Reference Guide](#) (ADTRAN's Knowledge Base article 2219).

WARNING

To prevent electrical shock, do not install equipment in a wet location or during a lightning storm.



The NetVanta 644 is intended to be installed, maintained, and serviced by qualified service personnel only and should be installed in a restricted access location as described in UL/IEC 60950-1.



Remove all power sources prior to servicing the unit.



Ethernet cables are intended for intra building use only. They should not be run outside the building.

Tools Required

The customer-provided tools required for the hardware installation of the NetVanta are:


- Ethernet cables
- Network cables (module dependent)
- Phillips-head screwdriver
- Drill and drill bit set (wallmount applications only)



To access the CLI of the NetVanta, you will also need a PC with terminal emulation software and a console port cable. Instructions on how to access the CLI are available in the quick start guide shipped with your unit or online at [ADTRAN's Knowledge Base](#).


Mounting Options

The NetVanta 644 can be installed in rackmount, wallmount, or tabletop configurations. The following sections provide step-by-step instructions for rack mounting and wall mounting.

 <p>CAUTION</p>	<p><i>When installing and operating the NetVanta 644, a minimum of 1-inch clearance should be maintained on all sides of the unit. The airflow inlets and outlets should be unobstructed at all times.</i></p>
---------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Rack Mounting the NetVanta


The NetVanta is a 1U-high, rack-mountable unit that can be installed into a 19-inch equipment rack. The following steps guide you in mounting the NetVanta into a rack.

 <p>CAUTION</p>	<ul style="list-style-type: none"> • <i>If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient temperature. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature specified by the manufacturer.</i> • <i>Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.</i> • <i>Be careful not to compromise the stability of the equipment mounting rack when installing this product.</i> • <i>Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading the circuit might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.</i> • <i>Reliable grounding of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g., use of power strips).</i>
----------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Instructions for Rack Mounting the NetVanta	
Step	Action
1	Attach the rackmount brackets using the supplied screws.
2	To allow proper grounding, scrape the paint from the rack around the mounting holes where the NetVanta will be positioned.
3	Position the NetVanta in a stationary equipment rack. This unit occupies 1U of space.
4	Have an assistant hold the unit in position as you install two mounting bolts through the unit's brackets and into the equipment rack using a #2 Phillips-head screwdriver.
5	Apply power to the unit (refer to Supplying Power to the Unit on page 22).

Wall Mounting the NetVanta

By following these instructions exactly, the NetVanta can be safely mounted on the wall.

	<ul style="list-style-type: none"> To avoid damaging the unit, use only the screws included in the shipment when attaching mounting ears to the chassis. When wall mounting the NetVanta, care must be taken not to damage the power cord. Do not attach the power cord to the building surface or run it through walls, ceilings, floors, or openings in the building structure. The socket-outlet must be installed near the equipment and must be easily accessible.
-----------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Instructions for Wall Mounting the NetVanta	
Step	Action
1	Remove the mounting brackets. Rotate them 90 degrees so that the portion of the bracket with the mounting holes is flush with the bottom of the chassis. Reattach the mounting bracket to the chassis (see Figure 3 on page 21).
2	Decide on a location for the NetVanta, keeping in mind that the unit needs to be mounted at or below eye-level so that the LEDs are viewable. The NetVanta 644 can only be wall mounted with the front panel facing to the right or left (see the example in Figure 3 on page 21).
3	Prepare the mounting surface by attaching a board (typically plywood, 3/4-inch to 1-inch thick) to a wall stud using #6 to #10 (2.5-inch or greater in length) wood screws. Important! Mounting to a stud ensures stability. Using sheetrock anchors may not provide sufficient long-term stability.
4	Have an assistant hold the unit in position as you install two #6 to #10 (1-inch or greater in length) wood screws through the unit's brackets and into the mounted board (see Figure 3 on page 21).
5	Proceed to the steps given in Supplying Power to the Unit on page 22 .

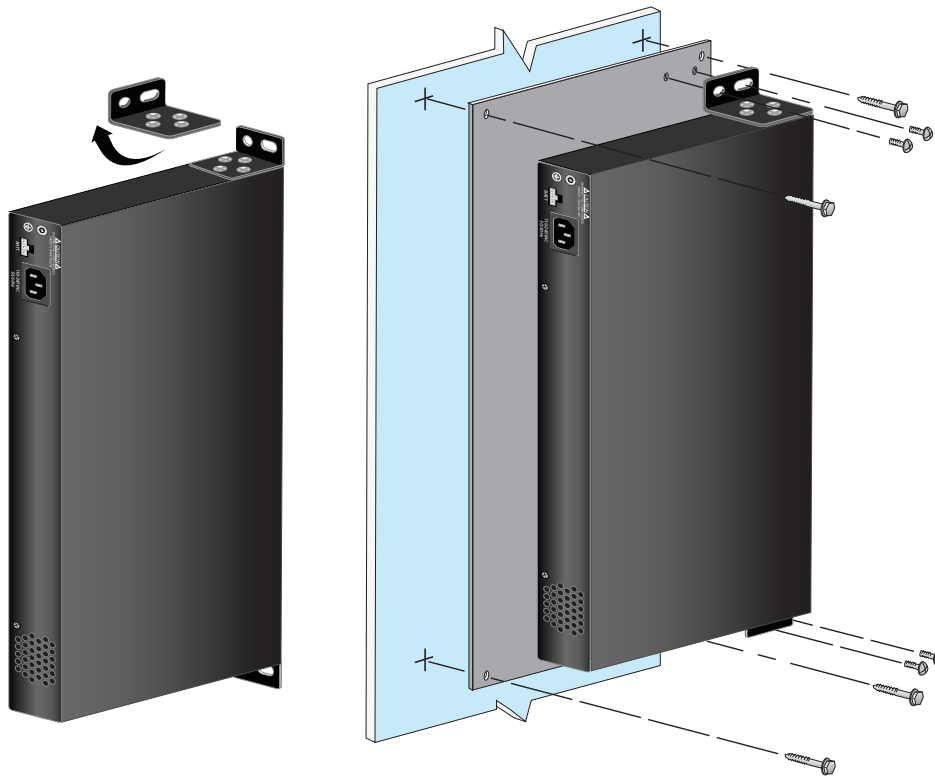


Figure 3. Wallmount Installation

Supplying Power to the Unit

The NetVanta 644 units come equipped with a 110 to 240 VAC, 50/60 Hz power supply for connecting to a properly grounded power receptacle. (A detachable power cable with a grounded, three-prong plug comes with the shipment.) To power this unit, connect the power cable to an appropriate AC power source.



- *In addition to the equipment earthing conductor in the power supply cord, a supplementary equipment earthing conductor is to be installed between the system and earth.*
- *The supplemental earthing conductor shall be connected to the equipment using a number 8 ring terminal and should be fastened to the grounding lug provided on the rear panel of the equipment. The ring terminal should be installed using the appropriate crimping tool (AMP P/N 59250 T-EAD Crimping Tool or equivalent).*
- *The supplementary equipment earthing conductor must not be smaller in size than cross-sectional area of not less than 2.5 mm², if mechanically protected. The supplementary equipment earthing conductor is to be connected to the product at the terminal provided, and connected to earth in a manner that will retain the earth connection when the power supply cord is unplugged. The connection to earth of the supplementary earthing conductor must be in compliance with the appropriate rules for terminating bonding jumpers in Part K of Article 250 of the National Electrical Code, ANSI/NFPA 70, and Article 10 of Part 1 of the Canadian Electrical Code, Part 1, C22.1. Termination of the supplementary earthing conductor is permitted to be made to building steel, to a metal electrical raceway system, or to any earthed item that is permanently and reliably connected to the electrical service equipment earthed.*
- *Bare, covered, or insulated earthing conductors are acceptable. A covered or insulated conductor must have a continuous outer finish that is either green, or green with one or more yellow stripes.*
- *A readily accessible disconnect device, that is suitably approved and rated, shall be incorporated in the field wiring.*
- *Maximum recommended ambient operating temperature is 50°C.*

Optional Battery Backup Unit (P/N 1175044L1)

The ADTRAN battery backup unit (BBU) is an optional device designed as a backup DC power supply for the NetVanta 644. The BBU connects to the NetVanta 644 through a 6-foot charge/discharge, 2-conductor wire with a keyed modular plug (included with the BBU). The 1175044L1 BBU is a low profile wallmount configuration. It can be rack mounted with the appropriate 19-inch or 23-inch rackmount adapter brackets. The 19-inch rackmount adapter bracket part number is P/N 1175047L1. The 23-inch rackmount adapter bracket part number is P/N 1175048L1.

Features of the BBU, P/N 1175044L1, include the following:


- No-spill battery design
- Compact wallmount or rackmount box
- Double BBU rack mounting available
- 7 AHR battery (up to 8 hours of backup, depending on load)
- Modular plug (provides quick and easy installation)
- All mounting hardware included

Unpack and Inspect the BBU

After unpacking the BBU unit, inspect it for damage. If damage is noted, file a claim with the carrier; then contact ADTRAN Customer Service.

Batteries are retained and prewired in the BBU in a specific pattern. Battery position is maintained by foam spacers press fitted against the housing walls. Removing batteries or disconnecting wires compromises correct reassembly and should not be attempted.

BBU Safety and EMC Notices

 CAUTION	<ul style="list-style-type: none"> • <i>Removing the BBU covers could allow batteries to fall out.</i> • <i>The BBU should only be used in specified ADTRAN applications.</i> • <i>The BBU (P/N 1175044L1) weighs in excess of 30 pounds. Arrange for assistance when handling the BBU for mounting.</i>
-----------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including that which may cause undesired operation.

Wall Mounting the BBU

Figure 4 shows the BBU (P/N 1175044L1) mounting dimensions for the NetVanta 644.

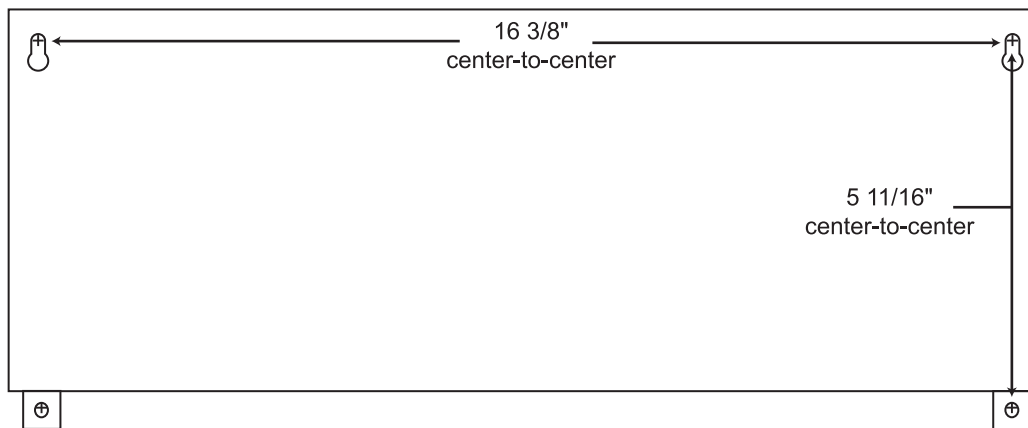


Figure 4. Wall Mounting the BBU

Install the BBU as follows:

Instructions for Wall Mounting the BBU	
Step	Action
1	Decide on a location for the BBU, keeping in mind that the cable plugs must be able to reach their designated sockets in the NetVanta unit.
2	Prepare the mounting surface by attaching a board (typically plywood, 3/4-inch to 1-inch thick) to a wall stud using #6 to #10 (2.5-inch or greater in length) wood screws. <i>Important! Mounting to a stud ensures stability. Using sheetrock anchors may not provide sufficient long-term stability.</i>
3	Ensuring a plumb measurement, mark where the pilot holes are to be drilled according to the dimensions given in the documentation included with your shipment.
4	Drill all four pilot holes using a size 1/16-inch drill bit.
5	Screw two #10 x 3/4-inch pan-head screws into the top two previously drilled holes. Let the head of each screw protrude 1/16 inch from the plywood to engage the keyhole slot.



Do not let the weight of the BBU rest on the two keyhole screws. Maintain support until the lower two screws are fully inserted.

6	With an assistant, lift the BBU and position to engage the screw heads. Allow the unit to slide down until the slot end rests against the screws.
7	Insert the two lower screws through the tabs and tighten securely.
8	Use cable ties as appropriate. The battery connection from the BBU should be directly connected to the BATT port on the rear of the chassis.

BBU Maintenance

- The BBU does not require routine maintenance for normal operation. The life expectancy of the BBU is 3 to 5 years on standby when used at room temperature.
- Excessive heat decreases battery power and life. Extreme low temperature also decreases battery capacity. Ideal ambient temperature for battery life and capacity is 20°C.
- Battery shelf life is extended in cooler temperatures.
- To order replacement batteries, reference the following part number: 1975044L1 (12 V replacement batteries).

ADTRAN is an environmentally friendly company. Therefore, we encourage the proper recycling and handling of the batteries. Federal and state laws prohibit the improper disposal of all lead acid batteries. The customer is responsible for the handling of their batteries from the day of purchase through their ultimate disposal. For more information on battery replacement and recycling, refer to the document [Battery Replacement and Recycling](#).

BBU Specifications

Table 2 provides BBU specifications.

Table 2. BBU Specifications

Battery	
Part Number:	311212V02
Suppliers:	YUASA and Panasonic
Batteries:	7 AHR per battery
Voltage:	-12 VDC per battery
Backup Time:	Up to 8 hours
Wire Gauge:	18 AWG
Environmental	
Operating Temperatures:	Charge: -15°C to 50°C Discharge: -20°C to 60°C
Preferred:	20°C
Physical Dimensions	
P/N 1175044L1:	17-inch W x 6.5-inch H x 3.5-inch D
Weight:	30 lb

Your NetVanta unit is now ready to be configured and connected to the network. For information on configuration for a specific application, refer to the configuration guides provided online on the ADTRAN's Knowledge Base at <http://kb.adtran.com>. For details on the CLI, refer to the [AOS Command Reference Guide](#) (ADTRAN's Knowledge Base article 2219). All other related documents are also available online on the ADTRAN's Knowledge Base at <http://kb.adtran.com>.

APPENDIX A. CONNECTOR PIN DEFINITIONS

The following tables provide the pin assignments for the base unit.

Table A-1. T1/E1 Port Pinouts

Pin	Name	Description
1	RX	Receive data from the network—Ring
2	RX	Receive data from the network—Tip
3	—	Unused
4	TX	Transmit data toward the network—Ring
5	TX	Transmit data toward the network—Tip
6-8	—	Unused

Table A-2. 10/100/1000Base-T Ethernet Port Pinouts

Pin	Name	Description
1	TRD0+	Transmit/Receive Positive
2	TRD0-	Transmit/Receive Negative
3	TRD1+	Transmit/Receive Positive
4	TRD2+	Transmit/Receive Positive
5	TRD2-	Transmit/Receive Negative
6	TRD1-	Transmit/Receive Negative
7	TRD3+	Transmit/Receive Positive
8	TRD3-	Transmit/Receive Negative

Table A-3. CRAFT Port Pinouts

Pin	Name	Description
1	DCD	Data Carrier Detect (output)
2	TXD	Transmit Data (output)
3	RXD	Receive Data (input)
4	DTR	Data Terminal Ready (input)
5	GND	Signal Ground
6	DSR	Data Set Ready (output)
7	RTS	Request to Send (input)
8	CTS	Clear to Send (output)
9	—	Unused

Index

Numerics

10/100/1000Base-T Ethernet interfaces 15

B

battery backup unit
 features 22
 maintenance 24
 recycling batteries 24
 safety instructions 23
 specifications 25
 wall mounting instructions 23

C

command line interface 18
console interface 16

E

ETHERNET LEDs 15

F

front panel LEDs 15

I

installation
 battery backup unit 22
 rack mounting 19
 tools required 18
 unit 18
 wall mounting 20
interface
 10/100/1000Base-T Ethernet 15
 console 16

L

LEDs 15
 ETHERNET 15

REDUNDANCY STATUS 15
STATUS 15
T1/E1 15

P

physical description 14
pinouts
 craft port 27
 T1/E1 ports 27
power
 battery backup unit 16
 connection 16
 supplying to unit 22
product registration 6

R

rack mounting instructions 19
rear panel 16
REDUNDANCY STATUS LEDs 15

S

safety instructions 4
shipping contents 14
specifications
 battery backup unit 25
 NetVanta 644 17
STATUS LED 15

T

T1/E1 LEDs 15

W

wall mounting
 battery backup unit 24
wall mounting instructions 20
warranty 6

