


NetVanta Series CompactFlash

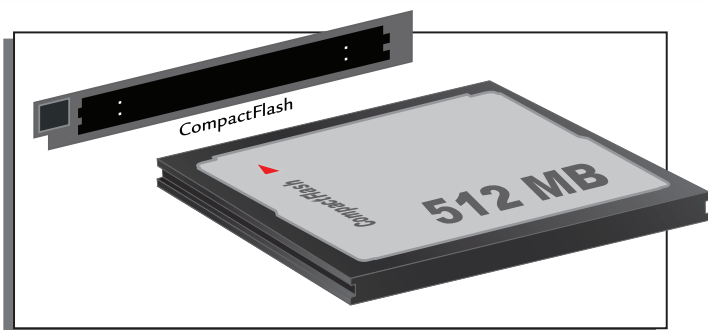

The NetVanta Series CompactFlash® slots support only ADTRAN-provided CompactFlash cards. The following is a list of ADTRAN-provided CompactFlash cards:

- 1200816E1 (128 Mbytes)
- 1200817E1 (256 Mbytes)
- 1200818E1 (512 Mbytes)
- 1200819E1 (1024 Mbytes)

NOTE

The CompactFlash card is hot-swappable on most NetVanta units and can be inserted or removed while power is applied to the unit.

**CAUTION**

For the NetVanta 7100, the CompactFlash card is not hot-swappable. Power must be removed from the unit before the CompactFlash card is inserted or removed.

P/N 1200816E1, 1200817E1, 1200818E1, 1200819E1

INSTALLATION INSTRUCTIONS

NETVANTA 7100

1. Remove power from the NetVanta 7100 unit.
2. Remove the two screws and the cover from the **CF** slot on the rear of the unit.
3. Slide the module into the **CF** slot until the card is firmly seated against the chassis.
4. Replace the **CF** slot cover.
5. Restore power to the unit. The CompactFlash options will now be available in the AOS Web-based graphical user interface (GUI) and command line interface (CLI).

ALL OTHER NETVANTA UNITS

1. Locate the CompactFlash slot on your NetVanta unit. This slot can be located on either the front or the back panel of the unit and is labeled **CompactFlash**.
2. Slide the card into the CompactFlash slot until it is firmly seated against the chassis.
3. Connect the cable to the associated device.
4. Perform a manual reload of AOS or cycle the power on the main unit. The CompactFlash options will now be available in the AOS GUI and CLI.