


## NetVanta Dual Stacking XAUI Interface Module (XIM)

P/N 1700470F1

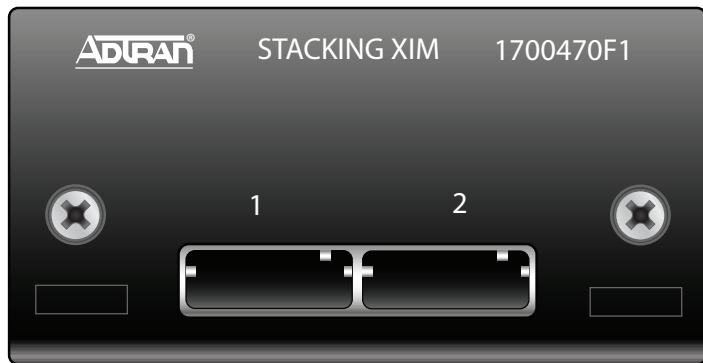

### INSTALLATION INSTRUCTIONS

1. Remove the cover from the option slot using a Phillips-head screwdriver.
2. Slide the option module into the option slot until the module is firmly seated against the chassis.
3. Secure the screws at both edges of the module with a screwdriver.
4. Connect the cable to the associated device.
5. Perform a manual reload of AOS or cycle the power on the main unit.



*XIMs are hot swappable. However, they will not function until the power is cycled or a manual reload of AOS is performed on the main unit. Refer to the [AOS Command Reference Guide](#) (ADTRAN's Knowledge Base article 2219) at <http://kb.adtran.com> for more information on the reload command.*

### SPECIFICATIONS

<b>Stacking Interface</b>	Data Rate: 10 Gbps, 20 Gbps bidirectional
<b>Compliance</b>	FCC Part 15 Class A, EN 55022 Class A, EN 55024 EN 60950-1, IEC 60950-1, AS/NZS 60950-1, UL/CUL 60950-1 RoHS compliant
<b>Physical</b>	Dimensions: 3.00-inch W x 1.57-inch H x 8.00-inch D Operating Temperature: 0°C to 50°C Storage Temperature: -20°C to 70°C Relative Humidity: Up to 95 percent, noncondensing



**CAUTION**

*NetVanta XIMs should be installed only in NetVanta 1638 and NetVanta 1638P products.*

**WARNING**

*For NetVanta modules with outside plant connections, ensure that all cables are removed from the module before installing or removing it from the NetVanta chassis.*

**NOTE**

**Important:** For additional details on product features, specifications, installation, and safety, refer to the [NetVanta 1600 Series Hardware Installation Guide](#) (ADTRAN's Knowledge Base article 3442) available at <http://kb.adtran.com>.

### STACKING CABLES

The Dual Stacking XIM is shipped with a 0.5 meter cable. Other cable lengths are available from ADTRAN. Refer to the list of available cables and their part numbers below.

Cable Length	ADTRAN Part Number
0.5 meter	1700500F1
2.0 meter	1700500F2
5.0 meter	1700500F5
2.0 meter Cx4 with jackscrews	1700504F2
5.0 meter Cx4 with jackscrews	1700504F5
2.0 meter Cx4 with latch	1700504F12
5.0 meter Cx4 with latch	1700504F15