

Documentation for ADTRAN Carrier Networks products is available for viewing and download directly from the ADTRAN Support Community website.


Go to: <https://supportforums.adtran.com/welcome>

Registration is required.

ADTRAN offers training courses on our products, including customized training and courses taught at our facilities or at customer sites.

For inquiries, go to: <http://adtran.com/training>

The following documents provide additional information for this product:  
*SFP/XFP/SFP+ Compatibility Matrix and Engineering Guide*

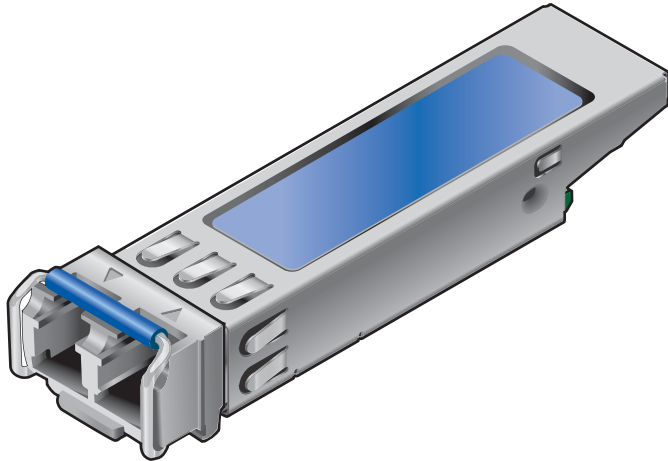

**DESCRIPTION**

The SFP+ 11.3G CWDM 70 km plugs into ADTRAN equipment designed to accept Small Form-Factor Pluggables (SFPs). Installed into an appropriate host unit, the SFP+ 11.3G CWDM 70 km provides a Coarse Wavelength Division Multiplexing (CWDM) interface to the supporting system.

**NOTE**

To ensure compatibility, refer to the documentation provided with the host module or splitter/combiner unit.

The following features are supported on the SFP+ 11.3G CWDM 70 km:

- ◆ 9.95 - 11.3 Gbps, CWDM, long reach, single-mode, 2-fiber operation
- ◆ 70 km maximum optical span

**NOTICE**

Due to compliance certification requirements, only SFPs supplied by ADTRAN are to be used with the host module. ADTRAN cannot certify system integrity with other SFPs.

This Job Aid supports the following SFP+ Modules:

Part Number	Wavelength (nm)	CLEI
1442471F1	1471	BVL3A1UD__
1442471F2	1491	BVL3A1VD__
1442471F3	1511	BVL3A1WD__
1442471F4	1511	BVL3A1XD__
1442471F5	1551	BVL3A1YD__
1442471F6	1571	BVL3A1ZD__
1442471F7	1591	BVL3A10D__
1442471F8	1611	BVL3A11D__

**Operational Specifications**

- Optical Specifications:
  - ◆ Optical transmit level: 0.0 dBm to +4.0 dBm
  - ◆ Optical receive level: -22.0 dBm to -7.0 dBm (11.1Gbps)  
-24.0 dBm to -7.0 dBm (9.95Gbps)
  - ◆ Power penalty: 1.0 dB
  - ◆ Optical budget: 21.0 (±1) dB
  - ◆ Minimum span attenuation: 11.0 dB
  - ◆ Optical connectors: LC
- Extended Environmental Support:
  - ◆ Operational temperature range: -40°C to +65°C
  - ◆ Storage temperature range: -40°C to +85°C
  - ◆ Relative humidity to 95%, noncondensing

## INSTALLATION

Before installing the equipment, inspect the SFP+ 11.3G CWDM 70 km. If damage has occurred during shipping, file a claim with the carrier, and then contact ADTRAN Customer Support. For more information, refer to “Warranty”.

To install the SFP+ 11.3G CWDM 70 km into an appropriate module, complete the following steps:

1. Insert the SFP+ 11.3G CWDM 70 km into the SFP cage on the circuit board of the host module with the latch handle facing outward. Slide the SFP+ 11.3G CWDM 70 km all the way into the cage.
2. Exert adequate pressure to ensure the SFP+ 11.3G CWDM 70 km is completely seated in the SFP+ 11.3G CWDM 70 km cage.
3. Do not remove the connector plug until the optical fiber connection is made.

### NOTE

The latch on the SFP+ is for removal only.

4. Continue the installation and turn-up of the host module using the instructions in the Job Aid provided with that module, or using the documentation, available online at [www.adtran.com](http://www.adtran.com).

### NOTICE

When removing an SFP+, remove the fibers first.

## STATUS INFORMATION

The SFP+ 11.3G CWDM 70 km is not directly accessible. To read status from the SFP+ 11.3G CWDM 70 km, access the user interface of the host module. Refer to the system manual provided with the host module for status details.

## MAINTENANCE

The SFP+ 11.3G CWDM 70 km does not require routine hardware maintenance for normal operation. ADTRAN does not recommend that repairs be attempted in the field. Repair services may be obtained by returning the defective unit to ADTRAN. Refer to the warranty for further information.

## SAFETY AND REGULATORY COMPLIANCE

### ⚠ WARNING

Read all warnings and cautions before installing or servicing this equipment.

### ⚠ CAUTION

This product uses a Class 1 Laser module that complies with 21 CFR 1040.10 and 1040.11 and IEC 60825-1 and -2. For continued compliance with the above standards, only approved Class 1 laser modules from an ADTRAN approved vendor list (located on the ADTRAN website) should be installed in this product. ADTRAN cannot certify system integrity with other laser modules.

### ⚠ CAUTION

- Electrostatic Discharge (ESD) can damage electronic modules. When handling modules, wear an antistatic discharge wrist strap to prevent damage to electronic components. Place modules in antistatic packing material when transporting or storing. When working on modules, always place them on an approved antistatic mat that is electrically grounded.
- Per GR-1089-CORE, this system is designed and intended for installation as part of either a Common Bonding Network (CBN) or Isolated Bonding Network (IBN).
- Per GR-1089-CORE Section 9, this product does not have an internal DC connection between battery return and frame ground. This product can be installed in a DC-I (isolated) or DC-C (common) configuration. For installations where other cards or the host system have internal connections between battery return and frame ground, the system would be intended for deployment only in a DC-C configuration.
- The chassis frame ground terminal must be connected to an earth ground to ensure that the metal enclosure of the SFP is properly grounded via the backplane connector.

### NOTE

- The SFP port is optical and therefore are not classified as any type of port as defined in Appendix B of GR-1089-CORE.
- This product is designed to be deployed in GR-3108-CORE environmental class 1 or 2 as defined in GR-3108-CORE.

The SFP+ 11.3G CWDM 70 km is NRTL Listed to the applicable UL standards. The SFP+ 11.3G CWDM 70 km meets or exceeds all the applicable requirements of NEBS, Telcordia GR-63-CORE, and GR-1089-CORE. The SFP+ 11.3G CWDM 70 km is intended for deployment in Central Office type facilities, EEEs, EECs, and locations where the NEC applies (for example, Customer Premises). Install the SFP+ 11.3G CWDM 70 km in an ADTRAN product located in a restricted access location.

Configuration Code	Input	Output
Power Code (PC)	F	C
Telecommunication Code (TC)	-	-
Installation Code (IC)	A	-

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by ADTRAN could void the user's authority to operate this equipment.

The SFP+ 11.3G CWDM 70 km is designed to meet the following environmental classes:

- ETSI EN 300 019-1-1 "Classification of environmental conditions; Storage," Class 1.2
- ETSI EN 300 019-1-2 "Classification of environmental conditions; Transportation," Class 2.3
- ETSI EN 300 019-1-3 "Classification of environmental conditions; Stationary use at weather-protected locations," Class 3.3

The equipment is designed to function without degradation during exposure to all test severities per Class 3.3 of ETSI EN 300 019-1-3.

This product complies with ETSI EN 300 386 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Telecommunication network equipment; Electromagnetic Compatibility (EMC) requirements."

The SFP+ 11.3G CWDM 70 km meets EU RoHS Directive 2002/95/EC and/or applicable exemptions. Refer to [www.adtran.com](http://www.adtran.com) for further information on RoHS/WEEE.

## FRANÇAIS

### ⚠ AVERTISSEMENT

Lisez tous les avertissements et mises en garde avant l'installation de cet équipement ou la réalisation de toute opération de maintenance.

### ⚠ ATTENTION

Ce produit utilise un module laser de classe 1 qui conforme aux normes 21 CFR 1040.10, 1040.11 et IEC 60825-1 et -2. Pour assurer la conformité aux normes mentionnées plus haut, seuls des modules laser de classe 1 approuvés provenant d'une liste de fournisseurs certifiés par ADTRAN (disponible sur le site d'ADTRAN) doivent être installés sur ce produit. ADTRAN ne peut certifier l'intégrité d'un système doté d'autres modules laser..

### ⚠ ATTENTION

- Une L'ESD (décharge électrostatique) peut endommager les modules électroniques. Lors de la manipulation des modules, portez un bracelet de décharge antistatique pour éviter d'endommager les composants électroniques. Placez les modules dans un emballage antistatique lors du transport ou du stockage. Lorsque vous travaillez sur les modules, placez-les toujours sur un tapis antistatique certifié muni d'un branchement de mise à la terre.
- La borne de mise à la terre du châssis doit être branchée à une prise de terre afin d'assurer que le boîtier métallique de la SFP est correctement mis à la terre grâce au connecteur de face arrière.

Ce produit est conçu pour répondre aux classes environnementales suivantes :

- ETSI EN 300 019-1-1 "Classification des conditions d'environnement; Entreposage," classe 1.2
- ETSI EN 300 019-1-2 "Classification des conditions d'environnements; Transport," classe 2.3
- ETSI EN 300 019-1-3 "Classification des conditions d'environnements; l'utilisation à poste fixe dans des endroits protégés contre les intempéries," classe 3.3

L'équipement est conçu pour fonctionner sans dégradation lors des tests à tous les niveaux de sévérité, suivant les spécifications de la classe 3.3 de l'ETSI EN 300 019-1-3.

Cet appareil est conforme à la norme ETSI EN 300 386 " Compatibilité électromagnétique et spectre radioélectrique (ERM); équipement des réseaux de télécommunications; exigences en matière de compatibilité électromagnétique (CEM).

Ce produit est conforme à la directive européenne RoHS 2002/95/CE et/ou aux exonérations applicables. Reportez-vous à [www.adtran.com](http://www.adtran.com) pour de plus amples renseignements sur RoHS/WEEE.

**DEUTSCH****⚠️ WARNUNG**

Lesen Sie sich alle Warn- und Sicherheitshinweise durch, bevor Sie dieses Gerät installieren oder warten.

**⚠️ VORSICHT**

Dieses Produkt nutzt ein mit den Richtlinien 21 CFR 1040.10 und 1040.11 und IEC 60825-1 und -2 konformes Class 1 Lasermodul. Damit die obigen Richtlinien auch in Zukunft eingehalten werden können, dürfen ausschließlich Class 1 Lasermodule von einem von ADTRAN zugelassenen Anbieter in dem Produkt installiert werden (erhältlich auf der Website von ADTRAN). ADTRAN garantiert nicht für die Systemintegrität bei anderen Lasermodulen.

**⚠️ VORSICHT**

- Elektrostatische Entladung können elektronische Module beschädigen. Tragen Sie beim Umgang mit Modulen ein Erdungsarmband, um Schäden an den elektronischen Komponenten zu vermeiden. Transportieren oder lagern Sie Module in antistatischem Verpackungsmaterial. Bei der Arbeit an den Modulen, achten Sie darauf, diese stets auf antistatische, elektrisch geerdete Matten zu legen.
- Die Erdungsschiene des Rahmens muss an eine Bodenstation angeschlossen werden, um sicherzustellen, dass das Metallgehäuse des SFP vorschriftsmäßig über den Rückwandanschluss geerdet ist.

Dieses Produkt wurde entsprechend der folgenden Umweltklassen entwickelt:

- ETSI EN 300 019-1-1 "Klassifikation von Umweltbedingungen, Lagerung," Klasse 1.2
- ETSI EN 300 019-1-2 "Klassifikation von Umweltbedingungen, Transport," Klasse 2.3
- ETSI EN 300 019-1-3 "Klassifikation von Umweltbedingungen, Stationärer Einsatz ohne Witterungseinflüsse," Klasse 3.3

Dieses Gerät funktioniert ohne Leistungsabfall während aller für Klasse 3.3 von ETSI EN 300 019-1-3 vorgeschriebenen Belastungstests.

Dieses Produkt erfüllt die ETSI EN 300 386 Norm "Elektromagnetische Verträglichkeit und Funkspektrumangelegenheiten (ERM); Einrichtungen des Telekommunikationsnetzes; Anforderungen zur elektromagnetischen Verträglichkeit."

Dieses Produkt erfüllt die EU RoHS Richtlinie 2002/95/EC und/oder gültige Ausnahmen. Bitte besuchen Sie [www.adtran.com](http://www.adtran.com) für ausführlichere Informationen zu RoHS/WEEE.



**Warranty:** ADTRAN will replace or repair this product within the warranty period if it does not meet its published specifications or fails while in service. Warranty information can be found online at [www.adtran.com/warranty](http://www.adtran.com/warranty).

©2014 ADTRAN, Inc. All Rights Reserved.



**ADTRAN CUSTOMER CARE:**  
From within the U.S. 1.800.726.8663  
From outside the U.S. +1 256.963.8716  
**PRICING AND AVAILABILITY 1.800.827.0807**



\* 6 1 4 4 2 4 7 1 F X - 2 2 A \*