


AOC

40G QSFP+ to 4SFP+ 3M

P/N: 1445018F4C

Quick Start

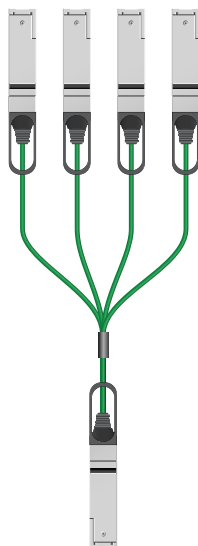

DESCRIPTION

The QSFP+ Active Optical Cable (AOC) to 4 x SFP+ Active Optical Cable (QSFP/SFP+) break-out is used for interconnection of 4 x 10 SFP+ optical links to a single 40 Gbps optical link. It operates at 10.3125 Gbps and the cable length is up to 100 meters. The QSFP+ AOC end is compliant with the QSFP+ MSA, 1EEE802.3ba 40GBASE - SR4 specifications. Each SFP+ end is compliant with the SFF8431 specification and SFF8432 MSA.

INSTALLATION

Before installing the equipment, inspect the SFP+ and QSFP+. If damage has occurred during shipping, file a claim with the carrier, and then contact ADTRAN Customer Support. For more information, refer to the warranty.

To install the QSFP/SFP+ into an appropriate module, complete the following steps:

Do not remove the protective end cap from the SFP+ or the QSFP+ until they are ready to be connected.

1. Insert the QSFP/SFP+ into the SFP cage on the module. Ensuring that the latch handle on the SFP is facing upward, slide the SFP all the way into the SFP cage until there is an audible "click".



NOTICE

The latch handle is for removal only. When removing the QSFP/SFP+, pull the latch away from the QSFP/SFP+. The QSFP/SFP+, should easily slide out of the cage.

2. Continue the installation and turn-up of the host module using the instructions in the documentation provided with the module or other system-level documentation available online at www.adtran.com.

MAINTENANCE

The QSFP/SFP+ does not require routine hardware maintenance for normal operation. ADTRAN does not recommend that repairs be attempted in the field. Repair services may be obtained by returning the defective unit to ADTRAN. Refer to the warranty for further information. Field support for software is provided through upgrade facilities.

SPECIFICATIONS

Specifications for the QSFP+ to 4XSFP+ are as follows:

- General
 - ◆ Module type: QSFP+ to 4XSFP+ Active Optical cable
 - ◆ Fiber/Copper: Fiber
 - SM/MM: Multimode Fiber
 - ◆ Optical Connector: N/A
 - ◆ Applications: 40GbE to 10GbE break-out applications, High performance computing interconnect
 - ◆ Distance: 3 meters
 - ◆ Digital Diagnostic Monitoring: SFF8636 Compliant
- Optical (On QSFP+ Side)
 - ◆ Transmitter
 - Laser Diode Type: VCSEL Array
 - Tx Central Wavelength: 850 nm
 - ◆ Receiver
 - Rx Type: PIN Array
 - Rx Central wavelength: 850 nm
- Optical (On SFP+ Side)
 - ◆ Transmitter
 - Laser Diode Type: VCSEL
 - Tx Central Wavelength: 850 nm

- ◆ Receiver
 - Rx Type: PIN
 - Rx Central wavelength: 850 nm
- Environmental
 - ◆ Controlled Protected Environment (Inside)
 - ◆ Operational Temperature Range: -5°C to + 55°C
 - ◆ Storage Temperature Range: -40°C to +85°C
 - ◆ Relative Humidity: 5 to 85%

SAFETY AND REGULATORY

ENGLISH



WARNING!

Read all warnings and cautions before installing or servicing this equipment.



CAUTION!

This product is a Class 1 Laser module that complies with FDA 21 CFR 1040.10 and 1040.11 and IEC 60825-1. This product is NRTL Listed and CB Certified to all applicable American and European safety standards. For continued compliance with the above standards, install only ADTRAN-approved Class 1 Laser Modules in ADTRAN products. For a list of ADTRAN-approved SFPs and XFPs, see <http://www.adtran.com/SFP>. ADTRAN cannot certify system integrity with other laser modules.



CAUTION!

- Electrostatic Discharge (ESD) can damage electronic modules. When handling modules, wear an antistatic discharge wrist strap to prevent damage to electronic components. Place modules in antistatic packing material when transporting or storing. When working on modules, always place them on an approved antistatic mat that is electrically grounded.
- The AOC meets or exceeds all the applicable requirements of NEBS, Telcordia GR-63-CORE, and GR-1089-CORE. The product is intended for deployment in Central Office type facilities, EEEs, EECs, and locations where the NEC applies (for example, Customer Premises).
- Per GR-1089-CORE the ADTRAN system that the AOC is being deployed in is designed and intended for installation as part of a Common Bonding Network (CBN). The ADTRAN system that the SFP is being deployed in is not designed nor intended for installation as part of an Isolated Bonding Network (IBN).
- This product does not have an internal DC connection between battery return and frame ground. This product can be installed in a DC-I (isolated) or DC-C (common) configuration.
- The chassis frame ground terminal must be connected to an earth ground to ensure that the exposed metal (i.e., front panels, SFP/XFP modules) on the product is properly grounded by way of the backplane connector.



NOTE

- The Gigabit Ethernet port(s) are optical and therefore are not classified as any type of port as defined in Appendix B of GR-1089-CORE.
- This product is designed to be deployed in GR-3108-CORE environmental class 1.
- This product is NRTL Listed to the applicable UL Standards.
- This product has also been evaluated to international safety standards EN 60950-1, AS/NZS 60950.1, and IEC 60950-1.
- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
 1. This device may not cause harmful interference.
 2. This device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by ADTRAN could void the user's authority to operate this equipment.
- This product is designed to meet the following environmental classes:
 - ◆ ETSI EN 300 019-2-1 "Classification of environmental conditions; Storage Class" 1.2
 - ◆ ETSI EN 300 019-2-2 "Classification of environmental conditions, Transportation", Class 2.3
 - ◆ ETSI EN 300 019-2-3 "Classification of environmental conditions, Stationary use at weather protected locations", Class 3.1E
- This product is designed to function without degradation during exposure to all test severities per Class 3.3 of ETSI EN 300 019-1-3.
- This product meets EU RoHS Directive. Refer to www.adtran.com for further information on RoHS/WEEE.

FRANÇAIS



AVERTISSEMENT!

Lisez tous les avertissements et mises en garde avant l'installation de cet équipement ou la réalisation de toute opération de maintenance.



ATTENTION!

Ce produit est un module laser de classe 1 qui est conforme à la FDA 21 CFR 1040.10 et 1040.11 et IEC 60825-1. Ce produit est NRTL et Certifié CB à toutes les normes de sécurité applicables américains et européens. Pour maintenir la conformité avec les normes ci-dessus, installer des modules laser de classe 1 ne ADTRAN approuvés dans les produits d'ADTRAN. Pour une liste des SFP et XFP ADTRAN approuvés, voir <http://www.adtran.com/SFP>. ADTRAN ne peut certifier l'intégrité du système avec d'autres modules laser.



ATTENTION!

- L'ESD (décharge électrostatique) peut endommager les modules électroniques. Lors de la manipulation des modules, portez un bracelet de décharge antistatique pour éviter d'endommager les composants électroniques. Placez les modules dans un emballage antistatique lors du transport ou du stockage. Lorsque vous travaillez sur les modules, placez-les toujours sur un tapis antistatique certifié muni d'un branchement de mise à la terre.
- La borne de terre de châssis doit être connecté à une prise de terre pour assurer que le métal exposé (tels que les panneaux avant, des modules SFP / XFP) sur le produit est correctement mis à la terre via le connecteur de fond de panier.



REMARQUE

- Ce produit a été conçu pour répondre aux normes internationales de sécurité EN 60950-1, AS / NZS 60950,1 et IEC 60950-1.
- Ce produit est conçu pour répondre aux classes environnementales suivantes:
 - ◆ ETSI EN 300 019-1-1: "Classification des conditions d'environnement; Entreposage," classe 1.2
 - ◆ ETSI EN 300 019-1-2: "Classification des conditions d'environnements; Transport," classe 2.3
 - ◆ ETSI EN 300 019-1-3: "Classification des conditions d'environnements; l'utilisation à poste fixe dans des endroits protégés contre les intempéries," classe 3.1E
- L'équipement est conçu pour fonctionner sans dégradation lors des tests à tous les niveaux de sévérité, suivant les spécifications de la classe 3.3 de l'ETSI EN 300 019-1-3.
- Ce produit est conforme à la directive. Reportez-vous à www.adtran.com pour de plus amples renseignements sur RoHS/WEEE.

DEUTSCH



WARNUNG!

Lesen Sie sich alle Warn- und Sicherheitshinweise durch, bevor Sie dieses Gerät installieren oder warten.



VORSICHT!

Dieses Produkt ist ein Klasse 1 Laser -Modul, das mit der FDA 21 CFR 1040.10 und 1040.11 und IEC 60825-1 entspricht. Dieses Produkt wurde NRTL gelistet und CB Certified allen geltenden amerikanischen und europäischen Sicherheitsstandards. Für die ständige Einhaltung der oben genannten Normen, installieren Sie nur ADTRAN zugelassene Klasse 1 Lasermodule in ADTRAN Produkte. Eine Liste der ADTRAN zugelassene SFPs und XFPs finden Sie unter <http://www.adtran.com/SFP>. ADTRAN kann nicht die Unversehrtheit des Netzes mit anderen Laser-Module zertifizieren.



VORSICHT!

- Elektrostatische Entladung (ESD) können elektronische Baugruppen beschädigt werden. Beim Umgang mit Modulen , tragen Sie eine Antistatikarmband, um Schäden an elektronischen Bauteilen zu verhindern. Ort -Module in antistatische Verpackung, beim Transport oder Lagerung. Bei Arbeiten an Modulen immer legen Sie sie auf einer zugelassenen antistatische Unterlage, die elektrisch geerdet ist.
- Der Fahrgestellrahmen Erdanschluß muß zu einer Erde verbunden werden, um sicherzustellen, dass das freiliegende Metall (dh Frontplatten, SFP / XFP-Module) auf dem Produkt richtig über den Backplane-Anschluss geerdet ist.



HINWEIS

- Dieses Produkt wurde entwickelt, um internationalen Sicherheitsnormen EN 60950-1 erfüllen, AS / NZS 60950,1 und IEC 60950-1.
- Dieses Produkt wurde entsprechend der folgenden Umweltklassen entwickelt:
 - ◆ ETSI EN 300 019-2-1 "Klassifizierung von Umweltbedingungen"; Storage Class 1,2
 - ◆ ETSI EN 300 019-2-2", Klassifizierung von Umweltbedingungen,Transportation", der Klasse 2.3
 - ◆ ETSI EN 300 019-2-3 "Klassifizierung von Umweltbedingungen, Ortsfester Einsatz, wettergeschützten Standorten" Klasse 3.1E
- Dieses Gerät funktioniert ohne Leistungsabfall während aller für Klasse 3.3 von ETSI EN 300 019-1-3 vorgeschriebenen Belastungstests.
- Dieses Produkt erfüllt die EU RoHS Richtlinie. Bitte besuchen Sie www.adtran.com für ausführlichere Informationen zu RoHS/WEEE.

Documentation for ADTRAN Network Solutions products is available for viewing and download directly from the ADTRAN Support Community website.

Go to: <https://supportforums.adtran.com/welcome>

Registration is required.

ADTRAN offers training courses on our products, including customized training and courses taught at our facilities or at customer sites.

For inquiries, go to: <http://adtran.com/training>

The following online documents and resources provide additional information for this product:
ADTRAN Pluggable Optics Compatibility Matrix (online tool, go to: <http://www.adtran.com/sfp>)

Warranty: ADTRAN will replace or repair this product within the warranty period if it does not meet its published specifications or fails while in service. Warranty information can be found online at www.adtran.com/warranty.

Trademarks: Brand names and product names included in this document are trademarks, registered trademarks, or trade names of their respective holders.

©2017 ADTRAN, Inc. All Rights Reserved.



ADTRAN CUSTOMER CARE:
From within the U.S. 1.888.423.8726
From outside the U.S. +1 256.963.8716
PRICING AND AVAILABILITY 1.800.827.0807

