




ADTRAN ISU 2x64 and PICTURETEL 4000 Configuration

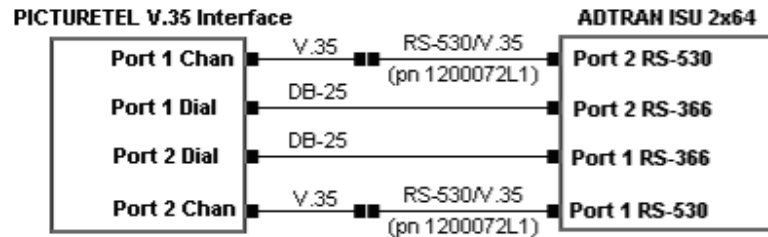

Picturatel Setting

Under Network Configuration
Two Line Dialing Mode: Delayed

ISU 2x64 Setting

Switch type: per telco
Terminal ID: per telco
Dial Options: RS-366
Auto Answer: Enabled
Answer Tone: No Answer Tone
Connect Timeout: 30 sec
Call Screening: Answer Any
SBUS Termination: 100 Ohm Off if U
On if S/T

Following DTE settings for both ports

DTE: Synchronous
Connector Type: V.35
RTS Options: 1 ms Delay
CTS Options: Follow RTS
CD Options: Normal
DTR Options: Idle When Off
DSR Options: Off Idle & Test
Transmit Clock: Normal
Protocol: Clear Channel if making 2x calls,
Bonding if using one port calls