




ADTRAN ISU 512 and PICTURETEL 4000 Configuration

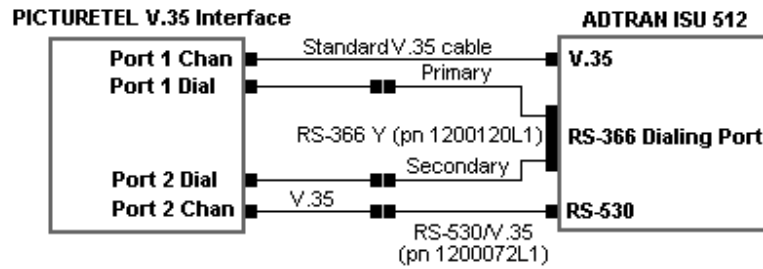

Picturetel Setting

Under Network Configuration
Two Line Dialing Mode: Delayed

ISU 512 Setting

1. Program **Switch type** and **Terminal ID** settings per telco
 2. Make sure that 7 digit LDNs are programmed
 3. Quick Setup: **Video 384k**
Sets the Following
Auto Answer: Enabled
Call Type: 64k
Dial Options: RS-366
Max Bit Rate: 384k
DTR Options: Idle when Off
530/V35 Cable: Enabled
RS366-Y Cable: Enabled
-