



Setting the Time Zone Offset on an IP 700 Series Phone



Overview:

By default, ADTRAN IP 700 Series phones are set to use Central time. This document will explain how to set the Time Zone/GMT Offset.

Configuration Steps:

1. In the web interface on the NetVanta 7000 Series products, go to *Voice->IP Phone Globals->Global Files->ADTRAN adtran_customer.txt*
2. Add a line similar to the following line in the textbox. Each entry shown below must be on a single line, or the phone will have problems reading the config file. The time zone offset is specified in a \pm hmm format relative to GMT. So for Central time, which has a -6 hours and 0 minute offset from GMT, the following line would be used.

GmtOffset -0600

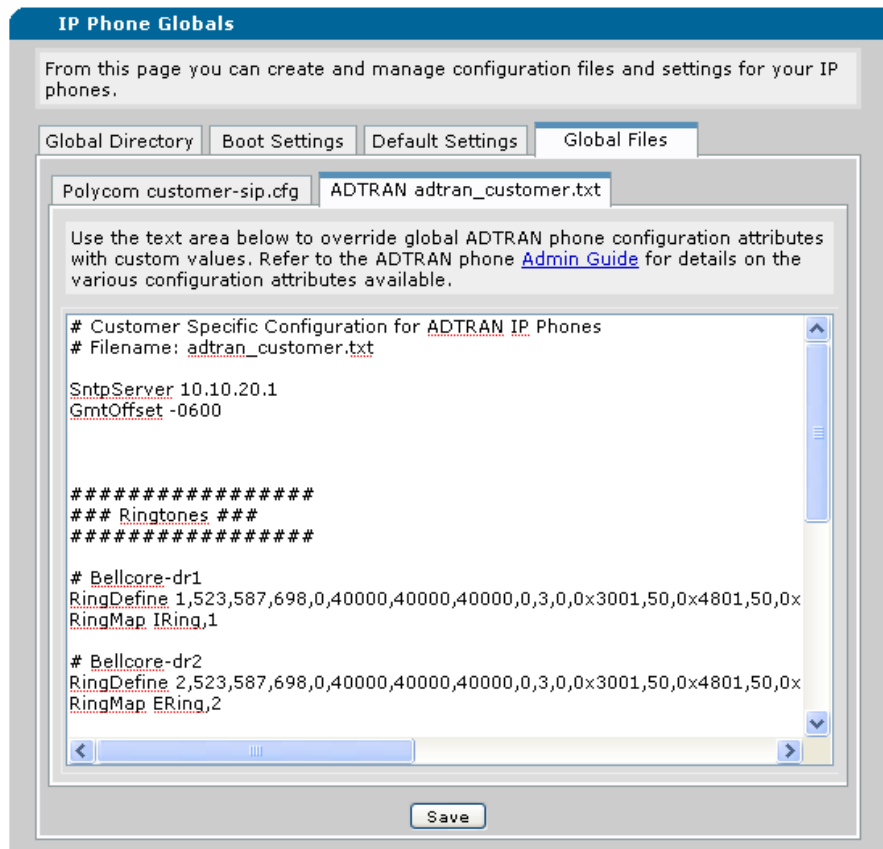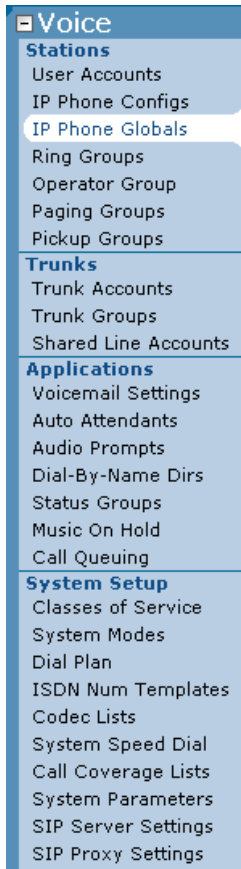

3. Click Save
4. Reboot the phone(s) manually or select the MAC address of the phones and select the Sync Phones action on the *IP Phone Configs* page. This will cause the phone(s) to reboot and download the new configuration